

**KENNEDY** Oxygen Regulators  
QUALITY INDUSTRIAL TOOLING

Designed with 2 gauges to indicate cylinder contents and outlet pressure.

**4.0 Bar Oxygen Regulator**  
Full 300 bar capacity.

**10.0 Bar Oxygen Regulator**  
Full 300 bar capacity.

Bottom entry design, which is suited for top outlet cylinder valves. Fitted with 1/4" parallel threaded gauges, standard 3/8" BSP outlet and 5/8" BSP inlet connections.



Gas Type	Order Code	Price/1 THB
10.0 Bar Oxygen	<b>KEN-884-4120K</b>	<b>3423.00</b>
4.0 Bar Oxygen	<b>-4140K</b>	<b>3423.00</b>

**Argon & Acetylene Regulators**

Designed with two gauges to indicate cylinder contents and outlet pressure.


Argon regulator outlet gauge is calibrated for flow 0 - 35lpm. Acetylene regulator has a calibrated flow rate of 0 - 1.5 bar with a full 250 bar capacity.

**Features:**

Flow rates up to 80m<sup>3</sup>/h (2824 ft<sup>3</sup>/h) 300 bar capability. Features 2 gauges displaying cylinder contents and pressure.

Bottom entry design suited for top outlet cylinder valves.


Fitted with 1/4" parallel threaded gauges. Fitted with standard 3/8" BSP outlet. Fitted with 5/8" BSP inlet connections.

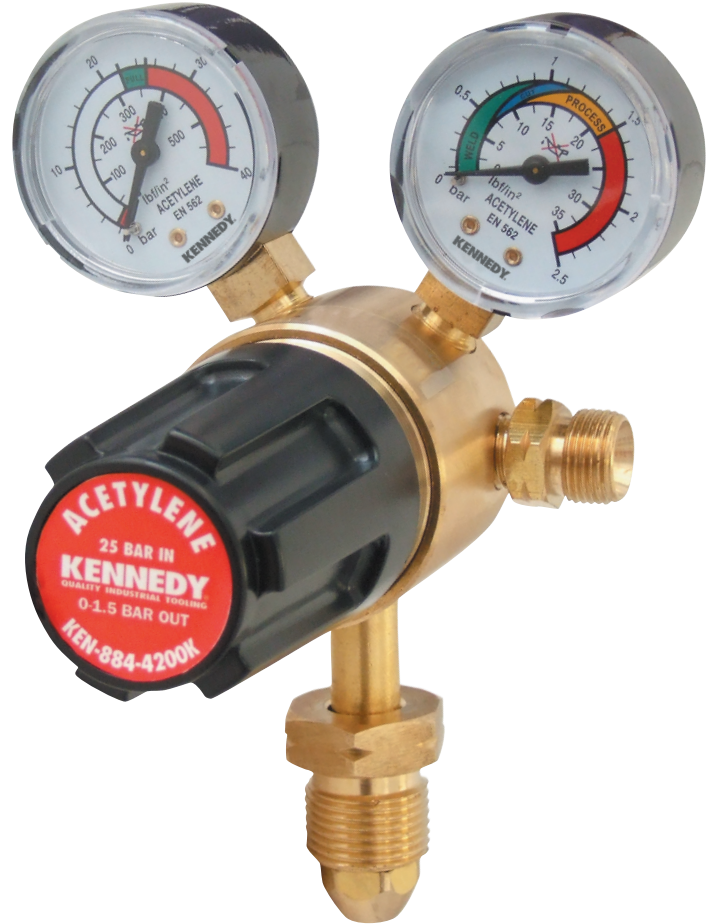

Gas Type	Order Code	Price/1 THB
Acet. Regulator	<b>KEN-884-4200K</b>	<b>3423.00</b>
Argon Regulator	<b>-4300K</b>	<b>3423.00</b>

**Nozzle Cleaner Set**

Prolongs the life of gas welding and cutting nozzles. High strength, needle type files housed in an anodised aluminium flip-up pocket case.

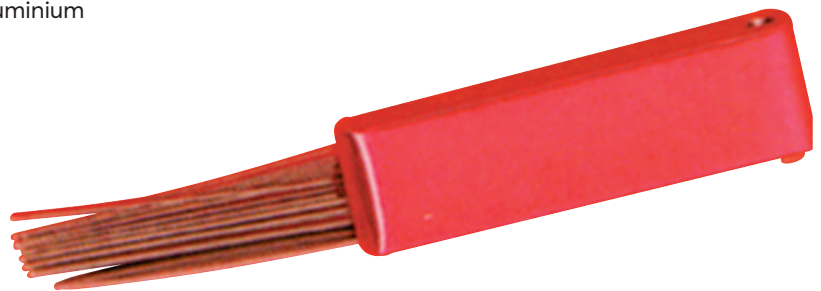

Product Number	Weight each	Order Code	Price/1 THB
1216	20g	<b>KEN-883-2500K</b>	<b>714.00</b>