




Find more information on V-Belts on page 95.



3HEU3

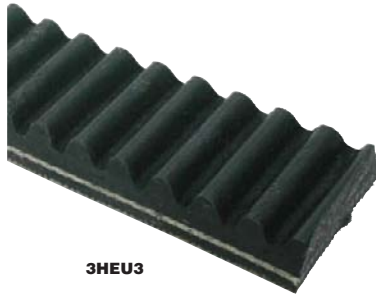

Variable Speed Belts

Oil- and heat-resistant top cover for dimensional stability. Use with belt systems that have smaller pulleys, wide speed ranges, high-horsepower demands, or high-heat applications. These belts are often used in band saws, milling machines, and conveyor systems that can speed up and slow down. Manufactured to tolerances set by the ARPM (Association of Rubber Products Manufacturers).

| Industry No. | Top Width | Outside L | Groove Angle | Item No. |
|--------------|-----------|-----------|--------------|----------|
| 1228V255 | 3/4 in | 26 in | 28° | 3HEU3 |
| 1422V290 | 7/8 in | 29 1/2 in | 22° | 3HEU4 |
| 1626V290 | 1 in | 29 1/2 in | 26° | 3HEU5 |
| 1922V277 | | 28 1/2 in | 22° | 3HEU6 |
| 1922V298 | | 30 1/2 in | 22° | 3HEU7 |
| 1922V338 | | 34 1/2 in | 22° | 3HEU8 |
| 1922V363 | | 36 3/2 in | 22° | 3HEU9 |
| 1922V386 | | 39 1/4 in | 22° | 3HEV1 |
| 1922V403 | | 40 3/2 in | 22° | 3HEV2 |
| 1922V426 | 1 1/8 in | 43 1/4 in | 22° | 3HEV3 |
| 1922V443 | | 44 3/2 in | 22° | 3HEV4 |
| 1922V454 | | 46 in | 22° | 3HEV5 |
| 1922V484 | | 49 in | 22° | 3HEV6 |
| 1922V526 | | 53 1/4 in | 22° | 3HEV7 |
| 1922V544 | | 55 in | 22° | 3HEV8 |
| 1922V604 | | 61 in | 22° | 3HEV9 |
| 2230V273 | | 28 in | 30° | 3HEW1 |
| 2230V275 | 1 3/8 in | 28 1/4 in | 30° | 3HEW2 |
| 2230V345 | | 35 3/2 in | 30° | 3HEW3 |
| 2322V441 | | 44 3/4 in | 22° | 3HEW4 |
| 2322V481 | 1 7/8 in | 48 3/2 in | 22° | 3HEW5 |
| 2322V541 | | 54 3/4 in | 22° | 3HEW6 |
| 2322V601 | | 60 3/2 in | 22° | 3HEW7 |
| 2426V343 | | 35 in | 26° | 3HEW8 |
| 2428V345 | | 35 1/4 in | 28° | 3HEW9 |
| 2430V345 | 1 1/2 in | 35 1/4 in | 30° | 3HEX1 |
| 2430V354 | | 36 3/2 in | 30° | 3HEX2 |
| 2830V363 | 1 3/4 in | 37 1/4 in | 30° | 3HEX3 |



Micro Ribbed V-Belts for Compressors



These 6-rib belts feature high tensile strength plus oil and heat resistance. Suitable for use with many Dayton, Speedaire, and other brand compressors. They can also be use with high-speed drive systems in washing machines, vacuum cleaners, lawn mowers, and medical equipment. Manufactured to tolerances set by the ARPM (Association of Rubber Products Manufacturers).

| Industry No. | No. of Ribs | Outside L | Brand | Item No. |
|---|-------------|-----------|---------------|----------|
| J (3/16 in Top Width by 5/32 in Thick) | | | | |
| 410J6 | 6 | 41 in | Dayton | 3X707 |
| 460J6 | 6 | 46 in | Dayton | 3X655 |
| 490J6 | 6 | 49 in | Dayton | 3X542 |
| PJ (3/16 in Top Width by 1/8 in Thick) | | | | |
| 2PJ246 | 2 | 9.7 in | Eagle Belting | 60GK72 |
| 2PJ256 | 2 | 10.1 in | Eagle Belting | 60GK75 |
| 2PJ263 | 2 | 10.3 in | Eagle Belting | 60GK78 |
| 2PJ265 | 2 | 10.4 in | Eagle Belting | 60GK81 |
| 2PJ286 | 2 | 11.3 in | Eagle Belting | 60GK84 |
| 2PJ314 | 2 | 12.3 in | Eagle Belting | 60GK87 |
| 2PJ326 | 2 | 12.8 in | Eagle Belting | 60GK90 |
| 2PJ336 | 2 | 13.2 in | Eagle Belting | 60GK93 |
| 2PJ346 | 2 | 13.6 in | Eagle Belting | 60GK96 |
| 2PJ376 | 2 | 14.8 in | Eagle Belting | 60GK99 |
| 2PJ388 | 2 | 15.2 in | Eagle Belting | 60GL03 |
| 2PJ435 | 2 | 17.1 in | Eagle Belting | 60GL06 |
| PJ (3/8 in Top Width by 1/8 in Thick) | | | | |
| 4PJ246 | 4 | 9.7 in | Eagle Belting | 60GK74 |
| 4PJ256 | 4 | 10.1 in | Eagle Belting | 60GK77 |
| 4PJ263 | 4 | 10.3 in | Eagle Belting | 60GK80 |
| 4PJ265 | 4 | 10.4 in | Eagle Belting | 60GK83 |
| 4PJ286 | 4 | 11.3 in | Eagle Belting | 60GK86 |
| 4PJ314 | 4 | 12.3 in | Eagle Belting | 60GK89 |
| 4PJ326 | 4 | 12.8 in | Eagle Belting | 60GK92 |
| 4PJ336 | 4 | 13.2 in | Eagle Belting | 60GK95 |
| 4PJ346 | 4 | 13.6 in | Eagle Belting | 60GK98 |
| 4PJ376 | 4 | 14.8 in | Eagle Belting | 60GL02 |
| 4PJ388 | 4 | 15.2 in | Eagle Belting | 60GL05 |
| 4PJ435 | 4 | 17.1 in | Eagle Belting | 60GL08 |
| PJ (3/4 in Top Width by 1/8 in Thick) | | | | |
| 3PJ246 | 3 | 9.7 in | Eagle Belting | 60GK73 |
| 3PJ256 | 3 | 10.1 in | Eagle Belting | 60GK76 |
| 3PJ263 | 3 | 10.3 in | Eagle Belting | 60GK79 |
| 3PJ265 | 3 | 10.4 in | Eagle Belting | 60GK82 |
| 3PJ286 | 3 | 11.3 in | Eagle Belting | 60GK85 |
| 3PJ314 | 3 | 12.3 in | Eagle Belting | 60GK88 |
| 3PJ326 | 3 | 12.8 in | Eagle Belting | 60GK91 |
| 3PJ336 | 3 | 13.2 in | Eagle Belting | 60GK94 |
| 3PJ346 | 3 | 13.6 in | Eagle Belting | 60GK97 |
| 3PJ376 | 3 | 14.8 in | Eagle Belting | 60GL01 |
| 3PJ388 | 3 | 15.2 in | Eagle Belting | 60GL04 |
| 3PJ435 | 3 | 17.1 in | Eagle Belting | 60GL07 |



6AGK5



6AGK6



6AGK7



10Y311



V-Belt Accessories

WALL RACK

36"L with mounting holes and includes six 6" hooks. Not for V-belts over 72"L.

TENSION CHECKER

Compact, spring-loaded. Adjustable for 10" to 170" belt span and up to 35 lb. of tension.

RULE

Aluminum slide adjustment and measures (3L, 4L, 5L, A, B, 3V, and 5V) V-belts up to 100". With mounting holes.

SHEAVE GROOVE GAUGE

Handy tool lets you quickly check belt section and sheave groove wear.

| Description | Brand | Item No. |
|---------------------|-------------|----------|
| Wall Rack | Power Drive | 6AGK5 |
| Rule | Power Drive | 6AGK6 |
| Tension Checker | Power Drive | 6AGK7 |
| Sheave Groove Gauge | TB Woods | 10Y311 |