



L	Eye Length	Vertical Load	Choker Hitch Cap.	Basket Hitch Capacity	Color Code	DAYTON		LIFT-ALL	
						Width Under Load	Item No.	Width Under Load	Item No.
Endless									
3 ft.	—	2600 lb.	2,100 lb	5,200 lb	Purple	1 1/2 in	2MJK3	1 in	4A767
3 ft.	—	5300 lb.	4,200 lb	10,600 lb	Green	1 1/2 in	2MJL4	1 3/8 in	3KN79
3 ft.	—	8400 lb.	6,700 lb	16,800 lb	Yellow	1 1/2 in	2MJJ3	1 3/4 in	2RU55
4 ft.	—	2600 lb.	2,100 lb	5,200 lb	Purple	1 1/2 in	2MJK5	1 in	3KN75
4 ft.	—	5300 lb.	4,200 lb	10,600 lb	Green	1 1/2 in	2MJL6	1 3/8 in	3KN80
4 ft.	—	8400 lb.	6,700 lb	16,800 lb	Yellow	1 1/2 in	2MJN4	1 3/4 in	3KN81
6 ft.	—	2600 lb.	2,100 lb	5,200 lb	Purple	1 1/2 in	2MJK7	1 in	3KN76
6 ft.	—	5300 lb.	4,200 lb	10,600 lb	Green	1 1/2 in	2MJL7	1 3/8 in	4A768
6 ft.	—	8400 lb.	6,700 lb	16,800 lb	Yellow	1 1/2 in	2MJN5	1 3/4 in	3KN82
6 ft.	—	13,200 lb.	10,600 lb	26,400 lb	Red	2 1/4 in	2MJP1	2 in	2RU58
6 ft.	—	21,200 lb.	17,000 lb	42,400 lb	Blue	3 in	2MJP6	2 3/8 in	2RU61
8 ft.	—	2600 lb.	2,100 lb	5,200 lb	Purple	1 1/2 in	2MJK9	1 in	3KN77
8 ft.	—	5300 lb.	4,200 lb	10,600 lb	Green	1 1/2 in	2MJL8	1 3/8 in	4A769
8 ft.	—	8400 lb.	6,700 lb	16,800 lb	Yellow	1 1/2 in	2MJN6	1 3/4 in	3KN83
8 ft.	—	13,200 lb.	10,600 lb	26,400 lb	Red	2 1/4 in	2MJP2	2 in	3KN73
8 ft.	—	21,200 lb.	17,000 lb	42,400 lb	Blue	3 in	2MJP7	2 3/8 in	2RU62
10 ft.	—	2600 lb.	2,100 lb	5,200 lb	Purple	1 1/2 in	2MJL2	1 in	2RU52
10 ft.	—	5300 lb.	4,200 lb	10,600 lb	Green	1 1/2 in	2MJL9	1 3/8 in	3KN78
10 ft.	—	8400 lb.	6,700 lb	16,800 lb	Yellow	1 1/2 in	2MJN7	1 3/4 in	4A770
10 ft.	—	13,200 lb.	10,600 lb	26,400 lb	Red	2 1/4 in	2MJP3	2 in	3KN72
10 ft.	—	21,200 lb.	17,000 lb	42,400 lb	Blue	3 in	2MJP8	2 3/8 in	3KN74
12 ft.	—	5300 lb.	4,200 lb	10,600 lb	Green	1 1/2 in	2MJN1	1 3/8 in	2RU53
12 ft.	—	8400 lb.	6,700 lb	16,800 lb	Yellow	1 1/2 in	2MJN8	1 3/4 in	2RU56
12 ft.	—	13,200 lb.	10,600 lb	26,400 lb	Red	2 1/4 in	2MJP4	2 in	2RU59
12 ft.	—	21,200 lb.	17,000 lb	42,400 lb	Blue	3 in	2MJP9	2 3/8 in	2RU63
20 ft.	—	5300 lb.	4,200 lb	10,600 lb	Green	1 1/2 in	2MJN2	1 3/8 in	2RU54
20 ft.	—	8400 lb.	6,700 lb	16,800 lb	Yellow	1 1/2 in	2MJN9	1 3/4 in	2RU57
20 ft.	—	13,200 lb.	10,600 lb	26,400 lb	Red	2 1/4 in	2MJP5	2 in	2RU60
20 ft.	—	21,200 lb.	17,000 lb	42,400 lb	Blue	3 in	2MJR1	2 3/8 in	2RU64
Eye and Eye									
4 ft.	10 in	2600 lb.	2,100 lb	5,200 lb	Purple	2 1/4 in	2MJR2	2 1/4 in	2RU65
4 ft.	10 in	5300 lb.	4,200 lb	10,600 lb	Green	2 1/4 in	2MJR4	2 1/2 in	2RU67
4 ft.	12 in	8400 lb.	6,700 lb	16,800 lb	Yellow	2 1/2 in	2MJR6	2 1/2 in	2RU69
6 ft.	10 in	2600 lb.	2,100 lb	5,200 lb	Purple	2 1/4 in	2MJR3	2 1/4 in	2RU66
6 ft.	10 in	5300 lb.	4,200 lb	10,600 lb	Green	2 1/4 in	2MJR5	2 1/2 in	2RU68
6 ft.	12 in	8400 lb.	6,700 lb	16,800 lb	Yellow	2 1/2 in	2MJR7	2 1/2 in	2RU70

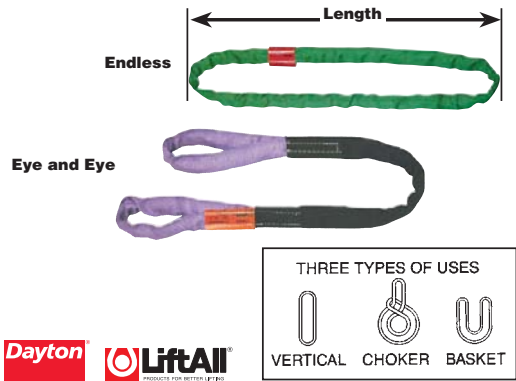

Dayton **LiftAll**
PRODUCTS FOR BETTER LIFTING

- Polyester Round Slings**
- Color-coded for quick identification
 - Sling flattens against load to grip tightly
 - Only 3% stretch for better load control

Load-bearing yarns protect from UV degradation and slings are resistant to grease and most acids. Wear points of all endless-style slings shift with each use for maximum sling life. Temperature range: -50° to 200°F. All load fibers protected by two woven covers. Eye and Eye style has an additional wear-resistant cover to extend sling life. Remove sling from service when red striped white core yarns are exposed. Meet or exceed all OSHA and ASME B30.9 Standards.

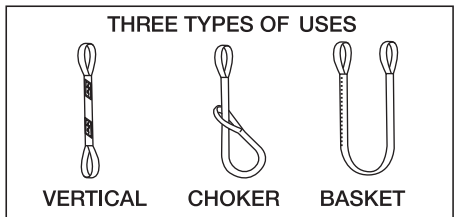

Twisted Eye and Eye - Type 4



Endless - Type 5

Poly Web Slings

- Available in lengths from 2 ft to 20 ft on Grainger.com
- Woven surface yarns cover each side and carry a portion of the load
- Longitudinal core yarns carry the majority of load
- Red core warning yarns indicate damage
- Red-Tag provides serial numbered identification for traceability

Surface yarns are connected side to side to protect core yarns, but also position surface and tensile yarns to work together to support the load. Meet or exceed all OSHA and ASME B30.9 Standards.

Endless-Type 5—Versatile slings economically priced for use in all three types of hitches: vertical, choker, and basket. Spread sling legs for improved load balance. Sling rotates to minimize wear.

Width	Vertical Hitch Cap.	Choker Hitch Cap.	Basket Hitch Cap.	Polyester Item No.	Tuff-Edge Polyester Item No.
Endless - Type 5					
Single-Ply					
1 in	3,200 lb	2,500 lb	6,400 lb	K7802	K7821
2 in	6,400 lb	5,000 lb	12,800 lb	K7804	K7822
3 in	8,800 lb	7,040 lb	17,600 lb	K7806	K7823
4 in	11,500 lb	9,200 lb	23,000 lb	K7807	K7824
6 in	16,500 lb	13,200 lb	33,000 lb	K7810	K7825
Double-Ply					
1 in	6,200 lb	4,900 lb	12,400 lb	K7812	K7826
2 in	12,400 lb	9,900 lb	24,800 lb	K7813	K7827
3 in	16,300 lb	13,000 lb	32,600 lb	K7816	K7828
4 in	20,700 lb	16,500 lb	41,400 lb	K7818	K7829
6 in	28,600 lb	23,000 lb	57,200 lb	K7820	K7830
Flat Eye and Eye - Type 3					
Single-Ply					
1 in	1,600 lb	1,280 lb	3,200 lb	K7832	K7851
2 in	3,200 lb	2,560 lb	6,400 lb	K7834	K7852
3 in	4,800 lb	3,840 lb	9,600 lb	K7836	K7853
4 in	6,400 lb	5,000 lb	12,800 lb	K7838	K7854
6 in	9,600 lb	7,700 lb	19,200 lb	K7840	K7855
Double-Ply					
1 in	3,200 lb	2,560 lb	6,400 lb	K7842	K7856
2 in	6,400 lb	5,000 lb	12,800 lb	K7844	K7857
3 in	8,800 lb	7,040 lb	17,600 lb	K7846	K7858
4 in	11,500 lb	9,200 lb	23,000 lb	K7847	K7859
6 in	16,500 lb	13,200 lb	33,000 lb	K7850	K7860

Flat Eye and Eye - Type 3

Flat Eye and Eye-Type 3—Popular slings for use in all three types of hitches: vertical, basket, and choker. Easier to remove from beneath the load than sling Types 1, 2, and 4.

Twisted Eye and Eye-Type 4—Similar to Type 3 except eyes are turned 90° and nest easily on the crane hook.

Universal Link-Type U—Helps extend sling life by protecting webbing from abrasion on rough crane hooks. Features UniLink fitting with Web-Trap on each end for use in three hitch types. UniLinks allow choking from either end to help vary wear points.

Width	Vertical Hitch Cap.	Choker Hitch Cap.	Basket Hitch Cap.	Polyester Item No.	Tuff-Edge Polyester Item No.
Twisted Eye and Eye - Type 4					
Single-Ply					
1 in	1,600 lb	1,280 lb	3,200 lb	K7866	K7885
2 in	3,200 lb	2,560 lb	6,400 lb	K7868	K7886
3 in	4,800 lb	3,840 lb	9,600 lb	K7870	K7887
4 in	6,400 lb	5,000 lb	12,800 lb	K7872	K7888
6 in	9,600 lb	7,700 lb	19,200 lb	K7874	K7889
Double-Ply					
1 in	3,200 lb	2,560 lb	6,400 lb	K7876	K7890
2 in	6,400 lb	5,000 lb	12,800 lb	K7878	K7891
3 in	8,800 lb	7,040 lb	17,600 lb	K7880	K7892
4 in	11,500 lb	9,200 lb	23,000 lb	K7881	K7893
6 in	16,500 lb	13,200 lb	33,000 lb	K7884	K7894
Universal Link - Type U					
Single-Ply					
2 in	3,200 lb	2,560 lb	6,400 lb	K7897	K7908
3 in	4,800 lb	3,840 lb	9,600 lb	K7899	K7909
4 in	6,400 lb	5,000 lb	12,800 lb	K7901	K7910
Double-Ply					
2 in	6,400 lb	5,000 lb	12,800 lb	K7903	K7911
3 in	8,800 lb	7,040 lb	17,600 lb	K7905	K7912
4 in	11,500 lb	9,200 lb	23,000 lb	K7906	K7913