

## Face-Mount Overhead Door Seals

Mount to overhead doors and docks to help keep out dust and drafts. Neoprene inserts.

**Flat Insert**—Mount on bottom or edge of door. Seals require min. 3/4" space between door and floor.

**Looped Insert**—Mount on bottom of door.



Aluminum Flange



No Flange


## Base-Mount Overhead Door Seals

Mount to overhead door bottoms to seal gaps up to 3/4" between door and floor. Seals remain flexible to -20°F. 3CEX9 includes two 4 1/2-ft. aluminum flanges and one 9-ft. long rubber insert.

3CEY1 includes four 4 1/2-ft. aluminum flanges and one 18-ft. long rubber insert.

L (ft.)	Flange Height (in.)	Flange Material	Insert Size	Projection (in.)	Mr. Model	Item No.
<b>Neoprene Flat Insert</b>						
6	7/8	Steel	1 1/2 in	1/4	197NA-6	3HRV3
8	7/8	Steel	1 1/2 in	1/4	197NA-8	3HRV4
10	7/8	Steel	1 1/2 in	1/4	197NA-10	3HRV5
12	7/8	Steel	1 1/2 in	1/4	197NA-12	3HRV6
<b>Neoprene Looped Insert</b>						
10	1 1/8	Aluminum	1 3/4 in	1 1/8	81369N-10	3HRV7
15	1 1/8	Aluminum	1 3/4 in	1 1/8	81369N-15	3HRV8

L (ft.)	Flange Width (in.)	Flange Height (in.)	Insert Size	Insert Material	Includes	Item No.
<b>Aluminum Flange</b>						
9	1 1/8	3/4	3/4 in	TPE Rubber	(2) 4 1/2 ft Metal Flanges, #6 x 3/4 in Stainless Steel Sheet Metal Screws, 9 ft Long Neoprene Insert	3CEX9
18	1 1/8	3/4	3/4 in	TPE Rubber	(4) 4 1/2 ft Metal Flanges, #6 x 3/4 in Stainless Steel Sheet Metal Screws, 18 ft Long Neoprene Insert	3CEY1
<b>No Flange</b>						
9	2	1	1 1/4 in	TPE Rubber	(1) Black Plastic Cap, (18) 1 in Nails	2RR9
16	2	1	1 1/4 in	TPE Rubber	(36) 1 in Nails, 1 in Black Plastic Cap	2RRU1
100	2	1	1 1/4 in	TPE Rubber	—	2RRU2

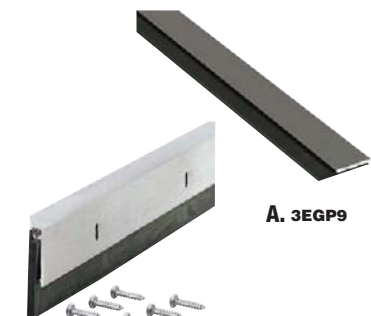

A. 3EGP9

## Door Sweeps

Fill the gap below the door and help keep out drafts, light, dust, and weather. Mounting holes included. For inside or outside applications on residential and commercial doors.

**A. Single-Fin**—Seal door and threshold gaps up to 3/4". Neoprene and EPDM material resist weather

and remain flexible in cold temperatures.

**B. Triple-Fin**—Multiple layers provide a positive seal for uneven floors. Seal gaps up to 3/4".

**C. Nylon Brush Insert**—Fibers fill gaps and sweep dirt, insects, and snow away from door. Oak flange can be painted or stained.


**D. Reinforced Neoprene Insert, Looped**—Create dead air space to insulate against drafts and hold sweep tightly against floor.

**E. Drip Cap**—Divert rain and debris away from door.

**F. Spring-Loaded Door Bottom**—Spring lowers door sweep automatically when door is closed. For use on swing-in doors.




B.

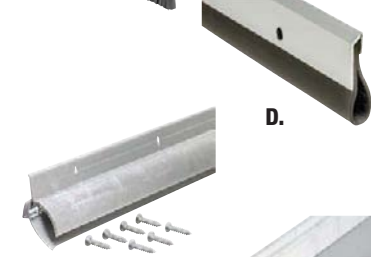

C.

D.

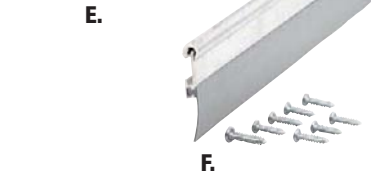

E.

F.

Key	Flange Material	Flange Height (in.)	Insert Size	Projection (in.)	3-FT. LENGTH Item No.	4-FT. LENGTH Item No.
<b>Single-Fin, Vinyl Insert</b>						
A	Aluminum	3/4	7/8 in	1/4	—	3EGU3
<b>Single-Fin, Neoprene Insert</b>						
A	Anodized Aluminum	1 1/4	7/16 in	1/4	3EGP9	3EGR1
A	Anodized Aluminum	1	2 in	3/8	5MUK1	5MUK2
A	Dark Bronze Aluminum	1 1/4	7/16 in	1/4	3EGR2	3EGR3
A	Dark Bronze Aluminum	1	2 in	3/8	5MUK3	5MUK4
A	Stainless Steel	1 1/4	7/16 in	3/16	3EGT5	3EGT6
<b>Single-Fin, EPDM Rubber Insert</b>						
A	Aluminum	1 3/16	1 3/16 in	1 5/16	2RRG5 *	—
A	Dark Brown Aluminum	1 3/16	1 3/16 in	1 5/16	2RRG7 *	2RRG8 *
<b>Triple-Fin, Vinyl Insert</b>						
B	Aluminum	2 3/32	7/8 in	1 3/64	1VZT1	—
B	Hardwood	1 1/4	1 in	1/4	2RRH1	—
B	Bronze	2 3/32	7/8 in	1 3/64	1VZT3	—
<b>Nylon Brush Insert</b>						
C	Anodized Aluminum	3/4	5/8 in	1/4	3EGR6	3EGR7
C	Dark Bronze Aluminum	3/4	5/8 in	1/4	3EGT7	3EGT8
C	Anodized Aluminum	7/8	5/8 in	1/4	3EGT1	3EGT2
C	Unfinished Oak Wood	1	5/8 in	3/8	3EGT4	—
C	Unfinished Oak Wood	—	1 9/16 in	3/8	3EGT3	—
<b>Reinforced Neoprene Insert, Looped</b>						
D	Anodized Aluminum	3/4	1 in	1/4	3HRH8	3HRH9
<b>Drip Cap, Vinyl Insert</b>						
E	Aluminum	1 1/2	1 13/16 in	5/8	2RRH6 *	—
<b>Drip Cap, Nylon Brush Insert</b>						
E	Aluminum	1 1/2	7/16 in	9/16	—	3EGR5
E	Bronze	1 3/8	9/16 in	1 3/64	2RRH9	—
<b>Spring-Loaded Door Bottom, Vinyl Insert</b>						
F	Aluminum	1 1/2	7/8 in	1 1/32	2RRJ1	—

\* UL Classified.



44ZZ69

45AA15



## Door Sweeps

Keep out drafts, dust and debris from below doors. Anodized aluminum construction.

Insert Size	Flange Height	Projection	7-FT. LENGTH Item No.	8-FT. LENGTH Item No.
<b>Single Fin Neoprene</b>				
7/16 in	1 1/4 in	3/16 in	44ZZ69	45AA68
1/2 in	1 1/8 in	1/4 in	45AD19	45AE23
1 in	7/8 in	3/16 in	—	45AC46
1 3/16 in	1 1/4 in	3/16 in	45AD72	—
<b>Single Fin Vinyl</b>				
3/4 in	1 1/8 in	1/4 in	45AA15	45AD78