

1-800-GRAINGER (472-4643)



A.
33J806

B.
3HHZ3

C.
3HHY1

D.
3HHZ2

E.
5U607

E.
3EHE8

E.
3HHY2

E.
3HHY6

G.
33J809

H.
3HHY4

I.
3HHY8


Floor-Mount Door Stops

Prevent an opening door from hitting the wall. With nonmarring rubber pads.

**ROCKWOOD®
ASSA ABLOY**

Key	Finish	Base Dia.	L	H	W	Brand	Item No.
Standard							
A	Polished Brass	—	2 ½ in	2 ¾ in	1 ½ in	—	33J806
A	Satin Chrome	—	2 ½ in	2 ¾ in	1 ½ in	—	33J807
B	Satin Chrome	2 ½ in	—	3 in	—	Rockwood	3HHZ3
B	Polished Brass	2 ½ in	—	3 in	—	Rockwood	3HHZ4
B	Satin Bronze	2 ½ in	—	3 in	—	Rockwood	3HHZ5
C	Zinc-Plated	1 in x 2 ½ in	2 ½ in	2 ½ in	1 in	Rockwood	3HHY1
Dome Door Stops							
D	Satin Chrome	2 in x 4 in	4 in	1 ½ in	2 in	Rockwood	3HHZ2
E	Satin Chrome	1 ½ in	—	1 ½ in	—	Rockwood	3EHF2
E	Satin Chrome	1 ¾ in	—	1 in	—	—	5U606
E	Satin Chrome	1 ¾ in	—	1 ¼ in	—	—	5U608
E	Satin Chrome	1 ½ in	—	1 ½ in	—	Rockwood	3EHF1
E	Bright Brass	1 ¾ in	—	1 in	—	—	5U607
E	Bright Brass	1 ¾ in	—	1 ¼ in	—	—	5U609
E	Polished Brass	1 ½ in	—	1 ½ in	—	Rockwood	3EHE8
E	Satin Bronze	1 ½ in	—	1 ½ in	—	Rockwood	3HHY2
E	Satin Bronze	2 in	—	1 ½ in	—	Rockwood	3HHY3
Dome Door Stops with ¾" Risers							
E	Satin Chrome	2 in	—	1 ½ in	—	Rockwood	3HHY6
Dome Door Stops with ½" Risers							
E	Satin Chrome	1 ¾ in	—	1 in	—	—	33J784
E	Satin Chrome	1 ¾ in	—	1 ½ in	—	—	33J786
Dome Door Stops with ¼" Risers							
E	Polished Brass	1 ¾ in	—	1 ½ in	—	—	33J814
E	Satin Bronze	1 ¾ in	—	1 ½ in	—	—	33J815
Rubber Bumper Door Stops							
G	Satin Chrome	1 ¼ in	—	1 ½ in	—	—	33J809
H	—	2 in	—	1 ½ in	—	Rockwood	3HHY4 *
I	Satin Chrome	3 ¼ in	—	3 in	—	Rockwood	3HHY8 *

* Mounting bolt size for 3HHY4 is ¾" x 2 ½", 3HHY8 is 1 ½" x 4 ½".



A.
3HHX3

A.
5U615

B.
4JG95

C.
3HHX1

D.
1XNN6

Circular-Mount Door Stops

Protect walls from damage caused by door knobs and levers.

Key	Finish	Base Dia.	Projection	Item No.
Concave Door Stop				
A	Satin Stainless Steel	2 ½ in	1 in	3HHX3
A	Satin Chrome	2 ½ in	1 in	5U614
A	Bright Brass	2 ½ in	1 in	5U615
A	Satin Bronze	2 ½ in	1 in	3HHX4
B	Rubber	1 ½ in	1 in	4JG96
B	Rubber	1 ½ in	1 in	4JG95
Convex Door Stop				
C	Satin Stainless Steel	2 ½ in	1 in	3HHX1
C	Satin Bronze	2 ½ in	1 in	3HHZ2
C	Satin Chrome	1 in	½ in	4JG91
C	Bright Brass	1 in	½ in	4JG87
D	White	2 ¼ in	1 in	1XNN4
D	—	2 ¼ in	1 in	1XNN6



A.
4JG90

B.
1XNP3

C.
1XNL4

D.
3HHZ6

E.
1RCR7

F.
1XNL8


G.
1RCT2

G.
1XNN2

Wall-Mount Door Stops

Prevent damage to walls and door hardware.

Key	Finish	Base Dia.	Projection	Item No.
Rigid				
A	Natural Aluminum/Bright Brass	1 in	3 in	4JG90
A	Bright Brass	1 in	3 in	4JG88
B	Oil-Rubbed Bronze	1 in	3 in	1XNP3
C	Satin Nickel	1 in	3 ½ in	1XNL4
C	Oil-Rubbed Bronze	1 in	3 ½ in	1XNL3
D	Satin Chrome	2 ¼ in	3 ¾ in	3HHZ6
D	Polished Brass	2 ¼ in	3 ¾ in	3HHZ7
D	Satin Bronze	2 ¼ in	3 ¾ in	3HHZ8
E	Satin Chrome	1 in	4 in	1RCR7
E	Brass	1 in	4 in	1RCR3
Spring				
F	Chrome	1 in	3 in	1XNL8
F	Bright Brass	1 in	3 in	4JG94
G	Brass	1 in	3 in	1RCT2
G	Satin Nickel	1 in	3 in	1XNN3
G	Oil-Rubbed Bronze	1 in	3 in	1XNN2

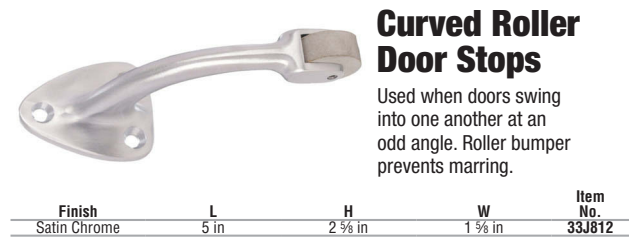

Curved Roller Door Stops

Used when doors swing into one another at an odd angle. Roller bumper prevents marring.

Finish	L	H	W	Item No.
Satin Chrome	5 in	2 ½ in	1 ½ in	33J812



1XNK6

4JG86

1RCT5

Hinge Pin Door Stops

Mount to door hinges to prevent wall damage.

Finish	Door Opening Adjustment	Item No.
Standard		
Chrome	35° to 90°	1XNK6
Antique Brass	35° to 90°	1XNK4
Brass	50° to 100°	1RCT5
Oil-Rubbed Bronze	50° to 100°	1XNN9
Brass	85° to 125°	4JG86
Hinge Pin		
Nickel-Plated	71° to 100°	33J804
Bright Brass	71° to 100°	33J805