

1-800-GRAINGER (472-4643)



Edge Trim and Edge Guard


Gripping Finger Trim—Flexible vinyl edge trim has a metal core and 1 or 2 gripping fingers to hold trim in place.

- Textured black

Edge Guard—Preglued, flexible black plastic trim with decorative finish. Great for vending machines, running boards, fender flares, car door edges and furniture.

- Temp. range: -20° to 150°F
- Hardness: 97
- Durometer: Shore A

Fits Edge	Leg Length	Overall Width	25 ft Item No.	100 ft Item No.	250 ft Item No.
Single Gripping Finger					
1/2 in	1 in	0.67 in	10C964	10C967	—
1/4 in	0.5625 in	0.42 in	10C933	10C939	10C945
1/8 in	0.4375 in	0.295 in	10H766	10H770	10H774
1/16 in	0.5625 in	0.295 in	10C930	10C936	10C942
3/16 in	0.375 in	0.2325 in	10H753	10H757	10H761
1/8 in	0.5625 in	0.3575 in	10C932	10C938	10C944
Dual Gripping Finger					
1/4 in	0.5 in	0.42 in	10C951	10C957	10C963
1/8 in	0.4375 in	0.295 in	10H778	10H782	10H786
1/16 in	0.5625 in	0.295 in	10C948	10C954	10C960
1/8 in	0.4375 in	0.2325 in	10H776	10H780	10H784
3/16 in	0.5625 in	0.3575 in	10C946	10C952	10C958
1/8 in	0.5312 in	0.2325 in	10C950	10C956	—
3/16 in	0.4375 in	0.2638 in	10H777	10H781	—
39/1250 in	0.4375 in	0.2013 in	10H775	10H779	10H783
1563/10000 in	0.5625 in	0.3263 in	10C949	10C955	—
			25 ft Item No.	50 ft Item No.	100 ft Item No.
Edge Guard					
0.3125 in			44M839	44M840	44M841
0.4375 in			44M842	—	44M844

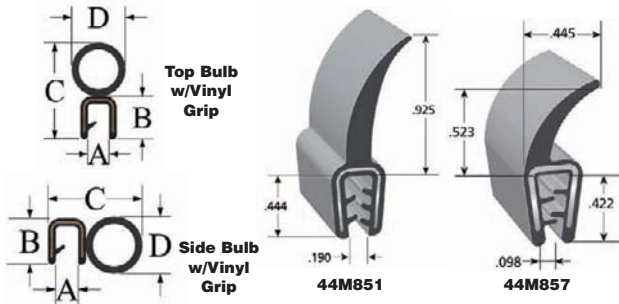

Edge Trim Seals


- Temp. range: -20° to 150°F
- Vinyl meets FMVSS 302 for flammability
- Textured black

Trim with EPDM closed-cell sponge rubber bulb is weather resistant. Nonmarking material. For indoor and outdoor use.

Flap and Trim Seals—EPDM dense rubber base with closed-cell EPDM rubber bulb is ideal for sealing boat hatches, RV compartment doors, tool boxes and tonneau covers.

- Temp. range: -40° to 212°F

Fits Edge (A)	Leg Length (B)	Overall Width (C)	Bulb Dia. (D)	25 ft Item No.	100 ft Item No.	250 ft Item No.
Top Bulb w/Vinyl Grip						
0.0625 in	0.375 in	0.2 in	0.2 in	10C978	10C986	10C994
	0.5625 in	0.375 in	0.375 in	10D004	10D016	—
	0.5625 in	0.625 in	0.625 in	10D078	10D090	—
0.125 in	0.5625 in	0.75 in	0.75 in	10D115	10D127	—
	0.5625 in	0.375 in	0.375 in	10D006	10D018	10D030
	0.5625 in	0.437 in	0.437 in	10D042	10D054	10D066
0.250 in	0.5 in	0.375 in	0.375 in	10D009	10D021	—
	0.5 in	0.625 in	0.625 in	10D081	10D093	—
	0.5 in	0.75 in	0.75 in	10D118	10D130	—
Side Bulb w/Vinyl Grip						
0.0625 in	0.5625 in	0.9825 in	0.75 in	10D107	10D119	—
	0.5625 in	0.732 in	0.437 in	10D036	10D048	10D060
	0.5625 in	0.92 in	0.625 in	10D072	10D084	10D096
0.125 in	0.5625 in	1.045 in	0.75 in	10D109	10D121	10D133
	0.5625 in	0.67 in	0.375 in	10C999	10D012	—
0.1875 in	0.5312 in	1.1075 in	0.75 in	10D111	10D123	10D135
	0.5312 in	0.7325 in	0.375 in	10D002	10D014	—
	0.5 in	1.045 in	0.625 in	10D075	10D087	—
0.250 in	0.5 in	1.17 in	0.75 in	10D112	10D124	—
	0.5 in	0.795 in	0.375 in	10D003	10D015	—
				25 ft Item No.	100 ft Item No.	
Flap						
0.190 in				—	1.369 in	0.444 in
0.98 in				0.445 in	0.945 in	0.422 in
Trim						
0.125 in				0.433 in	0.847 in	0.426 in
0.158 in				0.641 in	0.433 in	0.433 in

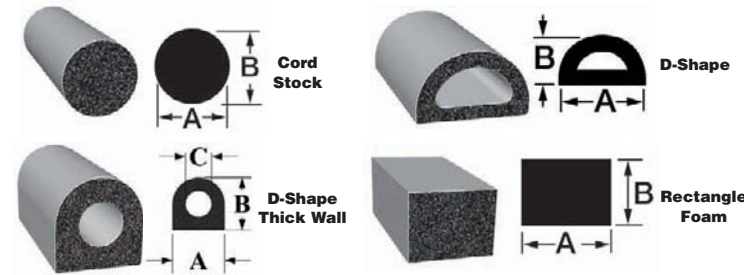

Cord Stock and Foam Rubber Seals

- Temp. range: -20° to 150°F
- Black

Cord Stock—Water- and weather-resistant EPDM closed-cell sponge rubber seals are softer than rubber bulbs. Create an easy-to-close seal against dust, noise, and vibration. Solid round cord. Cut to length with scissors or knife.

Foam Rubber Seals—Water-resistant EPDM closed-cell sponge rubber seals are weather resistant. Create an easy-to-close seal against dust, noise, and vibration. Cut to length with scissors or knife. High-strength foam acrylic adhesive creates an airtight seal between the rubber and substrate and has low initial tack for easy repositioning. General-purpose pressure sensitive adhesive is ideal for light-duty applications.

Overall Width (A)	Overall Height (B)	Core Dia (C)	Item No.
Cord Stock			
Plain			
1/2 in	1/2 in	25 ft	10G523
1/4 in	1/4 in	25 ft	10G517
3/8 in	3/8 in	25 ft	10G520
D-Shaped			
Foam Acrylic			
1/2 in	1/4 in	25 ft	10D170
3/4 in	3/8 in	25 ft	10G471
3/4 in	5/8 in	25 ft	10G483
3/8 in	1/4 in	25 ft	10G538
5/8 in	3/8 in	25 ft	10D164
Pressure Sensitive Adhesive			
1/2 in	1/4 in	25 ft	10D167
3/4 in	1/2 in	25 ft	10G474
3/4 in	5/8 in	25 ft	10G480
3/8 in	1/4 in	25 ft	10G535
5/8 in	3/8 in	25 ft	10D161
Rectangular			
Foam Acrylic			
1/2 in	1/4 in	25 ft	10G495
3/4 in	1/2 in	25 ft	10G514
Pressure Sensitive Adhesive			
3/4 in	1/4 in	25 ft	10G505
3/4 in	1/2 in	25 ft	10G511



Window Locking Gaskets

- Temp. range: -20° to 158°F
- Hardness: Shore A70
- Black

EPDM dense rubber locking gaskets secure gaps between glass windows and metal. Locking gasket key fits all double-piece locking gaskets. Maintenance Tool Kit 10G571 helps ensure an easy, efficient locking gasket installation.

Overall Height	Fits Edge	Fits Glass	Min. Clearance Between Glass and Edge	Item No.
Window Locking Gasket				
Single Piece				
.9"	0.09 in to 0.14 in	3/16 in to 1/4 in	0.25 in	25 ft 10G559
1"	0.075 in to 0.140 in	3/16 in to 1/4 in	0.145 in	25 ft 10G557
1.07"	0.035 in to 0.067 in	3/16 in to 1/4 in	0.3125 in	25 ft 10G549
Double Piece (requires key)				
1.1"	0.093 in to 0.14 in	3/16 in to 1/4 in	0.23 in	25 ft 10G547
EPDM Locking Gasket Key				
0.32 in	—	—	—	25 Ft. 10G561
Maintenance Tool Kit				
Description				Item No.
2-pc. Uninsulated (1) Gasket Tool, (1) Locking Key Tool and Locking Key Puller				10G571