



56FH55

Columbia
LIGHTING

LED Wall-Mounted Lights

- 120/277V AC
- Dimmable

These lights attach to a wall and shine light down onto floors and surfaces. They are commonly installed over sinks, in sitting rooms, and along corridors. LED lights use significantly less energy than fluorescent lights and have built-in LED arrays so there are no light bulbs to install or replace.

Max. Fixture Wattage	Color Temp.	Lumens	Lumens Per Watt	Color Index	Overall Width	Linkable	Series	Switch Mounted Right Item No.	Switch Mounted Left Item No.	Pull Switch Item No.
2 ft Nominal Length										
25 W	4000K	1,865 lm	75 lm/W	80	2 in	No	CWM	56FH55	56FH56	—
36 W	4000K	2,510 lm	70 lm/W	80	2 in	No	CWM	56FH57	56FH58	—
4 ft Nominal Length										
38 W	4000K	2,909 lm	77 lm/W	80	4 in	No	CWM	56FH62	56FH63	56FH64
43 W	4000K	3,261 lm	76 lm/W	80	4 in	No	CWM	56FH59	56FH60	56FH61

Columbia
LIGHTING

LED Stairwell Lights

- 120/277V AC
- Dimmable

LED lights mount to the wall in a stairwell to supply constant light at a low level or at full brightness when their onboard sensor detects movement. They help conserve energy by returning to a low-light setting when movement is no longer detected. These lights have built-in LED arrays so there are no light bulbs to install or replace.



45VT37

Max. Fixture Wattage	Color Temp.	Lumens	Lumens Per Watt	Color Index	Nom. L	Overall Width	Lighting Certification	Series	Item No.
Occupancy and Daylight Sensor									
34 W	4000K	4,100 lm	119 lm/W	80	4 ft	5 5/8 in	DLC 5.0	Escalate	656N94
Occupancy Sensor									
42.2 W	4000K	5,152 lm	122 lm/W	80	4 ft	5 in	Unrated	LBIL	45VT37

Lumination ALBEO

Architectural LED Suspended Lights

- 120/277V AC
- Dimmable

Linear fixtures hang down from the ceiling to provide more light than a pendant fixture and a more refined look than a strip light or wraparound light. They are well suited for open spaces such as offices, education centers, and other customer-facing areas. They use significantly less energy than fluorescent fixtures and have built-in LED arrays so there are no light bulbs to install or replace.



56FH94



56FH90


Max. Fixture Wattage	Color Temp.	Lumens	Lumens Per Watt	Color Index	Overall Length	Overall Width	Lighting Certification	Brand	Item No.
LALR Series									
Grid Continuous									
36.8 W	4000K	4,000 lm	90 lm/W	90	48 in	4 in	DLC 4.4	Lumination	56FH96
37.8 W	3500K	4,000 lm	90 lm/W	90	48 in	4 in	DLC 4.4	Lumination	56FH94
40.5 W	4000K	4,000 lm	90 lm/W	90	48 in	2 in	DLC 4.4	Lumination	56FH92
41.7 W	3500K	4,000 lm	90 lm/W	90	48 in	2 in	DLC 4.4	Lumination	56FH90
Grid Starter/Stand Alone									
36.8 W	4000K	4,000 lm	90 lm/W	90	48 in	4 in	DLC 4.4	Lumination	56FH97
37.8 W	3500K	4,000 lm	90 lm/W	90	48 in	4 in	DLC 4.4	Lumination	56FH95
40.5 W	4000K	4,000 lm	90 lm/W	90	48 in	2 in	DLC 4.4	Lumination	56FH93
41.7 W	3500K	4,000 lm	90 lm/W	90	48 in	2 in	DLC 4.4	Lumination	56FH91
LALS Series									
Cable Mount, 10ft Length									
32 W	4000K	1,000 lm	125 lm/W	90	48 in	2 1/2 in	Unrated	Albeo	56FH99
	4000K	1,000 lm	125 lm/W	90	48 in	3 1/2 in	Unrated	Albeo	56FJ03
33 W	3500K	1,000 lm	121 lm/W	90	48 in	2 1/2 in	Unrated	Albeo	56FH98
	3500K	1,000 lm	121 lm/W	90	46 in	3 1/2 in	Unrated	Albeo	56FJ02

Replacement Light Panels

Polymershapes USASEALING

Lay into the T-bar grid under the fixture.

Nom. Size	Color	Material	Panel Thickness	Brand	Item No.	Pkg. Qty.
Cracked Ice Pattern Light Diffusers						
2 ft x 4 ft	Clear	Acrylic	1/8 in	Polymershapes	4VZJ5	5
	Clear	Acrylic	1/8 in	Polymershapes	4VZH9	20
Parabolic Pattern Light Diffusers						
2 ft x 4 ft	White	Styrene	1/4 in	Polymershapes	4VZJ1	5
Prismatic Pattern Light Diffusers						
2 ft x 4 ft	Clear	Acrylic	3/32 in	USA Sealing	60UP53	5
	Clear	Polycarbonate	1/8 in	Polymershapes	3GYC1	1
	Clear	Acrylic	1/8 in	Polymershapes	4VZJ2	5
	Clear	Acrylic	3/32 in	USA Sealing	60UP52	2
	Clear	Acrylic	3/32 in	USA Sealing	60UP56	10
	Clear	Polycarbonate	1/8 in	USA Sealing	60UP80	10
	Opal	Acrylic	3/32 in	USA Sealing	60UP64	10
	White	Acrylic	1/8 in	Polymershapes	4VZJ4	5
	Clear	Polycarbonate	1/8 in	Polymershapes	3GYC2	1
	Smooth Pattern Light Diffusers					
2 ft x 4 ft	Opal	Polycarbonate	1/8 in	USA Sealing	60UR05	10

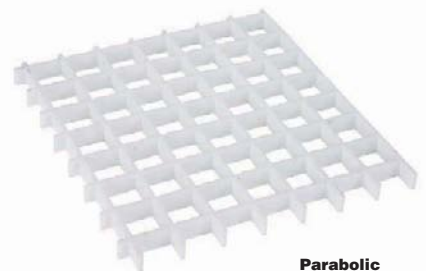

Parabolic
Pattern Light
Diffusers